

• Applied mechanics

5/7 (95) 2018 Content

APPLIED MECHANICS

- 6 Investigation of force factors and stresses at singular points of plate elements in special cranes
L. Kolomiets, V. Orobey, O. Daschenko, O. Lymarenko, Y. Ovcharov, R. Lobus
- 13 Theoretical research into spatial work of a steel-reinforced-concrete statically indeterminate combined structure
I. Ivanyk, S. Vikhot, Y. Vybranets, Y. Ivanyk
- 22 Numerical methods for contact analysis of complex-shaped bodies with account for non-linear interface layers
M. Tkachuk, N. Skripchenko, M. Tkachuk, A. Grabovskiy
- 32 Development of the procedure for the estimation of reliability of reinforced concrete beams, strengthened by building up the stretched reinforcing bars under load
R. Khmilt, R. Tytarenko, Y. Bilkharsky, P. Vegera
- 43 Calculation of toothed gear mechanisms in machines and assemblies considering the effect of lubricants
B. Ahmedov, A. Najafov, A. Abdullayev, I. Chalabi, F. Veilyev
- 54 Geometrical synthesis of spatial six-link guiding mechanisms
S. Kiluchkovskiy, M. Tykhan, T. Repetyio, Y. Hirnyak
- 62 Influence of elasticity of unbalance drive in vibration machines on its oscillations
N. Yaroshevich, I. Zabrodets, S. Shymchuk, T. Yaroshevich
- 70 Geometrical modeling of the unfolding of spatial rod structures, similar to the four-link pendulum, in weightlessness
L. Kutsenko, V. Vanin, O. Semkiv, L. Zapolskiy, O. Shoman, V. Martynov, G. Morozova, V. Danylenko, B. Kryvoshei, O. Kovalov
- 81 Abstract&References

EDITOR IN CHIEF

Demin Dmitry

Professor of the National Technical University «Kharkiv Polytechnic Institute»,
Director of Private Company «Technology Center», Kharkiv (Ukraine)

Terzlyan Vagan

Professor of the University of Jyväskylä (Finland)

EDITORIAL BOARD

ENGINEERING TECHNOLOGICAL SYSTEMS

Kindrachuk Myroslav, Professor of National Aviation University, Department of Tribological material science, powder metallurgy, functional materials, Kyiv (Ukraine); **Korzyuk Volodymyr**, Doctor of Technical Sciences, Director of the Chinese-Ukrainian E. O. Paton Welding Institute (CUIPW), Guangzhou (China); **Zagirnyak Mykhaylo**, Professor of Kremenchuk Mykhailo Ostrohradskiy National University, Department of electric machines and apparatus, Kremenchuk (Ukraine); **Zaloga Viliam**, Professor of Sumy State University, Department of manufacturing engineering, machines and tools, Sumy (Ukraine)

INFORMATION TECHNOLOGY. INDUSTRY CONTROL SYSTEMS

Cardoso Jorge, Professor of University of Coimbra, Faculty of Science and Technology, Coimbra (Portugal); **Jakab Frantisek**, Associate Professor of Technical University of Kosice, Department of Computers and Informatics, Kosice (Slovak Republic); **Lakhno Valeriy**, Professor of European University, Department of Managing Information Security, Kyiv (Ukraine); **Lytvyn Vasyi**, Professor of Lviv Polytechnic National University, Department of Information Systems and Networks, Lviv (Ukraine); **Ometayenko Borys**, PhD, Senior Software Engineer at Elsevier Amsterdam Area, Amsterdam (Netherlands); **Ostapov Serhii**, Professor of Yuri Fedkovych Chernivtsi National University, Department of Computer systems software, Chernivtsi (Ukraine); **Peleshchyns Andriy**, Professor of Lviv Polytechnic National University, Department of social communication and information activities, Lviv (Ukraine); **Terzlyan Vagan**, Professor of University of Jyväskylä, Department of Mathematical Information Technology, Jyväskylä (Finland); **Testyuk Vasyi**, Professor of Lviv Polytechnic National University, Department of Automated Control Systems, Lviv (Ukraine); **Zhottkevych Grygoriy**, Professor of Karazin Kharkiv National University, Department of Theoretical and Applied Computer Science of School of Mathematics and Computer Science, Kharkiv (Ukraine)

CONTROL PROCESSES

Butko Tatiana, Professor of Ukrainian State University of Railway Transport, Department of operational work and international transportation, Kharkiv (Ukraine); **Demin Dmitry**, Professor of National Technical University «Kharkiv Polytechnic Institute», director of the Private Company «Technology Center», Kharkiv (Ukraine); **Gogunsky Viktor**, Professor of Odessa National Polytechnic University, Department of Management of life safety systems, Odessa (Ukraine); **Myamlin Sergey**, Professor of Dnipropetrovsk National University of Rail Transport, Dnipro (Ukraine); **Panchenko Sergii**, Professor of Ukrainian State University of Railway Transport, Department of Automatic and computer remote control of train traffic, Kharkiv (Ukraine); **Prokhorchenko Andrii**, Professor of Ukrainian State University of Railway Transport, Department of Operational Work Management, Kharkiv (Ukraine); **Rab Nawaz Lodhi**, PhD, COMSATS Institute of Information Technology Satiwal Campus (Pakistan); **Sira Oksana**, Professor of National Technical University «Kharkiv Polytechnic Institute», Department of distributed information systems and cloud technologies, Kharkiv (Ukraine)

MATHEMATICS AND CYBERNETICS - APPLIED ASPECTS

Ahmad Izhar, Associate Professor of King Fahd University of Petroleum and Minerals, Department of Mathematics and Statistics, Dhahran (Saudi Arabia); **Atamanyuk Igor**, Professor Mykolaiv National Agrarian University, Department of Higher and Applied Mathematics, Mykolaiv (Ukraine); **Hari Mohan Srivastava**, Professor University of Victoria, Department of Mathematics and Statistics, Victoria (Canada); **Kondratenko Yurii**, Professor Petro Mohyla Black Sea National University, Department of Intelligent Information Systems, Mykolaiv (Ukraine); **Romanova Tetyana**, Professor Institute for Problems in Machinery of National Academy of Sciences of Ukraine, Department of Mathematical Modeling and Optimal Design, Kharkiv (Ukraine); **Sattarova Ulkar Eldar**, Associate Professor Azerbaijan University of Architecture and Construction, Department of Information technologies and systems, Baku (Azerbaijan); **Savanevych Vadym**, Professor State Space Agency of Ukraine, Kyiv (Ukraine); **Trujillo Juan J.**, Professor of Universidad de La Laguna, Faculty of Mathematics, San Cristobal de La Laguna (Spain); **Weber Gerhard Wilhelm**, Professor of Middle East Technical University, Institute of Applied Mathematics, Ankara (Turkey)

APPLIED PHYSICS

Bobitski Yaroslav, Professor of University of Rzeszow, Department of mechatronics, Rzeszów (Poland); **Giamazdin Alexander**, PhD, National Science Center «Kharkov Institute of Physics and Technology», Kharkiv (Ukraine); **Grishanov Nikolay**, Professor of Ukrainian State University of Railway Transport, Department of Physics of plasmas, Controlled Nuclear Fusion, Kharkiv (Ukraine); **Ilichuk Hryhorii**, Professor of Lviv Polytechnic National University, Department of General Physics, Lviv (Ukraine); **Machado Jose Antonio Tenreiro**, Professor of Polytechnic of Porto, Institute of Engineering, Department of Electrical Engineering, (Portugal); **Maryanchuk Pavlo**, Professor of Yuri Fedkovych Chernivtsi National University, Department of Physics, (Ukraine); **Maslov Volodymyr**, Professor of National Technical University of Ukraine «Igor Sikorsky Kyiv Polytechnic Institute», Department of Scientific, analytic and ecological instruments and systems, Kyiv (Ukraine); **Pavlenko Anatoliy**, Professor of Kielce University of Technology, Department of Building Physics and Renewable Energy, Kielce (Poland); **Starikov Vadim**, Associate Professor of National Technical University «Kharkiv Polytechnic Institute», Department of Physics of metals and semiconductors, Kharkiv (Ukraine); **Tkachenko Viktor**, Professor of V.N. Karazin Kharkiv National University, Department of Physics of Innovative Energy & Technology & Ecology, Kharkiv (Ukraine); **Tstzh Bohdan**, Professor of Stepan Gzhytskyi National University of Veterinary Medicine and Biotechnologies Lviv, Department of General Technical Subjects and Production Quality Control, Lviv (Ukraine); **Vovk Rustan**, Professor of Karazin Kharkiv National University, Department of low temperature physics, Kharkiv (Ukraine); **Zhelezny Vitaly**, Professor of Odessa National Academy of Food Technologies, Department of Thermal Physics and Applied Ecology, Odessa (Ukraine)

TECHNOLOGY ORGANIC AND INORGANIC SUBSTANCES

Arvaldas Gaidikas, Professor Kaunas University of Technology, Department of Physics, Kaunas (Lithuania); **Barsukov Vlachestav**, Professor Kyiv National University of Technologies and Design, Department for Electrochemical Power Engineering and Chemistry, Kyiv (Ukraine); **Carda Juan B.**, Professor of Universidad Jaime I, Department of Inorganic Chemistry, Castellon de la Plana (Spain); **Chumak Vitaliy**, Professor of National Aviation University, Department of Chemistry and Chemical Engineering, Kyiv (Ukraine); **Kapustin Alexey**, Professor of Pryazovskiy State Technical University, Department of Chemistry, Mariupol (Ukraine); **Kolosov Aleksandr**, Professor of National Technical University of Ukraine «Igor Sikorsky Kyiv Polytechnic Institute», Department of Chemical, Polymeric and Silicate Machine Building, Kyiv (Ukraine); **Krivenko Pavel**, Professor Kyiv National University of Construction and Architecture, Scientific Research Institute for Binders and Materials, Kyiv (Ukraine); **Piavan Viktoriia**, Professor Kyiv National University of Technologies and Design, Department of Applied Ecology, Technology of Polymers and Chemical Fiber, Kyiv (Ukraine); **Roshai Alexander**, V.N. Karazin Kharkiv National University, Research Institute of Chemistry, Kharkiv (Ukraine); **Sprynsky Myroslav**, Nicolaus Copernicus University in Torun, Department of Environmental Chemistry and Bioanalytics, Torun (Poland); **Sukhty Mikhaylo**, Professor of Ukrainian State University of Chemical Technology, Department of Processing of Plastics and Photo-, Nano- and polygraphic materials, Dnipro (Ukraine); **Vakhuta Yaroslav**, Professor of Lviv Polytechnic National University, Department of Silicate Engineering, Lviv (Ukraine)

APPLIED MECHANICS

Akhundov Vladimir, Professor of National metallurgical academy of Ukraine, Department of Applied mechanics, Dnipro (Ukraine); **Andrianov Igor**, Professor of RWTH Aachen University, Department of General Mechanics, Aachen (Germany); **Astanin Vyacheslav**, Professor of National Aviation University, Department of Mechanics, Kyiv (Ukraine); **Avramov Konstantin**, Professor of A. Podgorny Institute of Mechanical Engineering Problems of the National Academy of Sciences of Ukraine, Department of reliability and dynamic strength, Kharkiv (Ukraine); **Filimonikhin Gennadiy**, Professor of Central Ukrainian National Technical University, Department of Machine Parts and Applied Mechanics, Kropyvnytskyi (Ukraine); **Fomychev Petro**, Professor of National Aerospace University "Kharkiv Aviation Institute" named after N. E. Zhukovsky, Department of Aircraft strength, Kharkiv (Ukraine); **Legeza Viktor**, Professor of National Technical University of Ukraine "Igor Sikorsky Kyiv Polytechnic Institute", Department of Computer Systems Software, Kyiv (Ukraine); **Lyov Gennadiy**, Professor of National Technical University "Kharkiv Polytechnic Institute", Department of dynamics and strength of machines, Kharkiv (Ukraine); **Pukach Petro**, Professor of Lviv Polytechnic National University, Department of Computational Mathematics and Programming, Lviv (Ukraine); **Romualdovich Sergey**, Professor of National Aviation University, Department of Aircraft construction, Kyiv (Ukraine); **Yaroshevich Nikolai**, Professor of Lutsk National Technical University, Department of Branch Engineering, Lutsk (Ukraine)

ENERGY- SAVING TECHNOLOGIES AND EQUIPMENT

Avramenko Andriy, Professor of Institute of Engineering Thermophysics of National academy of sciences of Ukraine, Department of heat and mass transfer and hydrodynamics in heat power equipment, Kyiv (Ukraine); **Flaiko Natallia**, Professor of Institute of Engineering Thermophysics of National academy of sciences of Ukraine, Department of energy efficient of heat technologies, Kyiv (Ukraine); **Liubarskyi Borys**, Professor of National Technical University "Kharkiv Polytechnic Institute", Department of electrical transport and diesel locomotive, Kharkiv (Ukraine); **Rusanov Andrii**, Professor of A. Podgorny Institute of Mechanical Engineering Problems of the National Academy of Sciences of Ukraine, Department of Hydroaeromechanics of Power Machines, Kharkiv (Ukraine); **Sutikno Tole**, Professor of Universitas Ahmad Dahlan, Department of Electrical Engineering, Yogyakarta (Indonesia); **Tereshchenko Tatiana**, Professor of National Technical University of Ukraine "Kyiv Polytechnic Institute", Department of Industrial Electronics, Kyiv (Ukraine); **Yerokhov Valerij**, Professor of Lviv Polytechnic National University, Department of Semiconductor Electronics, Lviv (Ukraine)

INFORMATION AND CONTROLLING SYSTEM

Bezruk Valeriy, Professor of Kharkiv National University of Radio Electronics, Department of Information and Network Engineering, Kharkiv (Ukraine); **Shcherbakova Galyna**, Associate professor of Odessa National Polytechnic University, Department of electronic apparatus & information technology, Odessa (Ukraine); **Uryvsky Leonid**, Professor of National Technical University of Ukraine "Igor Sikorsky Kyiv Polytechnic Institute", Department of telecommunication, Kyiv (Ukraine); **Starovolnov Valery**, Professor, Doctor of sciences, United Institute of Informatics Problems, National Academy of Sciences of Belarus, Laboratory of System Identification, Minsk (Belarus); **Velychko Oleh**, Professor of State Enterprise "Ukrmetrteststandard", Institute of Electromagnetic Measurements, Kyiv (Ukraine); **Yatskiv Vasyi**, Associate professor of Ternopil National Economic University, Department of Cyber Security, Ternopil (Ukraine)

ECOLOGY

Boichenko Sergii, Professor of National aviation universit, Department of ecology, Kyiv (Ukraine); **Gomella Nikolai**, Professor of National Technical University of Ukraine "Igor Sikorsky Kyiv Polytechnic Institute", Department of Ecology and Technology of Plant Polymers, Kyiv (Ukraine); **Remez Natalya**, Professor of National Technical University of Ukraine "Igor Sikorsky Kyiv Polytechnic Institute", Department of Environmental Engineering, Kyiv (Ukraine); **Shvedchykova Iryna**, Professor Kyiv National University of Technologies and Design, Department of Electronics and Electrical Engineering, Kyiv (Ukraine)

TECHNOLOGY AND EQUIPMENT OF FOOD PRODUCTION

Adegoke Gabriel, Professor of University of Ibadan, Department of Food Technology, Ibadan (Nigeria); **Burdo Oleg**, Professor of Odessa National Academy of Food Technologies, Department of processes, equipment and energy management, Odessa (Ukraine); **Haftiz Ansar Rasul Suleria**, Ph.D, Kansas State University, Department of Food, Nutrition, Dietetics and Health, Manhattan (USA); **Pavlyuk Raisa**, Professor of Kharkiv State University of Food Technology and Trade, Department of Technology processing of fruits, vegetables and milk, Kharkiv (Ukraine)

MATERIALS SCIENCE

Buketov Andriy, Professor of Kherson State Maritime Academy, Department of Transport technologies, Kherson (Ukraine); **Dubok Vitalii**, Professor of Taras Shevchenko National University of Kyiv, Department of Radiophysical Faculty, semiconductor physical chair, Kyiv (Ukraine); **Duriagina Zola**, Professor of Lviv Polytechnic National University, Department of Applied Materials Science and Materials Engineering, Lviv (Ukraine); **Efremenko Vaslyi**, Professor of State Higher Educational Institution "Priazovskiy State Technical University", Department of Physics, Mariupol (Ukraine); **Gevorkyan Edwin**, Professor of Ukrainian State University of Railway Transport, Department of Quality, standartization, certification and materials making technology, Kharkiv (Ukraine); **Sobol Oleg**, Professor of National Technical University "Kharkiv Polytechnic Institute", Department of Materials Science, Kharkiv (Ukraine); **Yaremly Ivan**, Professor of Vasyi Stefanyk Precarpathian National University, Department of Material Science and New Technology, Ivano-Frankivsk (Ukraine)

<p>Honorary editor I. G. Filipenko Doctor of Technical Sciences, Professor Ukrainian State University of Railway Transport (Ukraine)</p> <p>Establishers PC «TECHNOLOGY CENTER» Ukrainian State University of Railway Transport</p> <p>Publisher PC «TECHNOLOGY CENTER»</p> <p>Editorial office's and publisher's address: Shatilova dacha str., 4, Kharkiv, Ukraine, 61145</p> <p>Contact information Tel.: +38 (057) 750-89-90 E-mail: ejet.kh@gmail.com Website: http://www.jet.com.ua, http://journals.urau.ua/ejet</p>	<p>Journal Indexing</p> <ul style="list-style-type: none"> Scopus CrossRef American Chemical Society EBSCO Index Copernicus Росси́йский индекс научного цитирования (РИНЦ) Ulrich's Periodicals Directory DRIVER Bielefeld Academic Search Engine (BASE) WorldCat Electronic Journals Library DOAJ ResearchBib Polska Bibliografia Naukowa Directory of Research Journals Indexing Directory Indexing of International Research Journals Open Academic Journals Index Sherpa/Romeo 	<p>Свідчення про державну реєстрацію журналу КВ № 21546-11446 ПП від 08.09.2015</p> <p>Атестовано Вищою Атестаційною Комісією України Перелік № 12 постанови Президії БАК № 1-05.36 від 11.06.03</p> <p>Постановою Президії БАК України № 1-05/2 від 27.05.2009, № 1-05/3 від 08.07.2009 Бюлетень БАК України</p> <p>Наказом Міністерства освіти і науки України №793 від 04.07.2014</p> <p>Підписано до друку 27.09.2018 р.</p> <p>Формат 60 × 84 1/8. Ум. друк. арк. 11,25. Обл.-вид. арк. 10,46 Тираж 1000 екз.</p>
---	---	---

Основними критеріями працездатності переважної більшості зубчастих механізмів є контактна витривалість сполучених поверхонь зубів і згинальна витривалість нізкоз зубів. При цьому розрахунок по контактним напруженням є основним з точки зору визначення геометричних розмірів зубчастих механізмів, а розрахунок на вигин зубів є перевірочним.

Як відомо, для продовження довговічності і збільшення працездатності та несучої здатності зубчастих механізмів використовуються різні мастильні матеріали. Однак через недостатнє вивчення питання впливу мастила на контактну витривалість активних поверхонь зубів в традиційних методах розрахунку зубчастих передач (наприклад, згідно з ГОСТ 21354-87) коефіцієнт впливу мастила прирівнюється до одиниці, тобто розглядається ідеальний випадок, коли тертя відсутнє. Такий підхід призводить до неточної оцінки несучої здатності зубчастих передач, що може виявитися як причиною їх передчасного виходу з ладу, так і привести до завищення їх геометричних розмірів.

В роботі вирішена контактна задача стикання двох тіл довільної форми, близьких до напівплощин при кінцевому коефіцієнті тертя і було встановлено, що значення отриманої контактної напруги перевищує напругу, яка обчислена згідно з відомим рішенням Герца на 6 %.

Запропонована методика розрахунку зубчастих коліс на контактну міцність при кінцевому коефіцієнті тертя, без припущень про малість ділянки дотику і форми кордонів, дозволяє оцінити здатність навантаження зубчастих передач з урахуванням впливу мастила і наявності тертя між сполученими поверхнями зубів.

Отримано аналітичний вираз для коефіцієнта впливу мастила на підставі рішення контактної задачі тиску жорсткого штамп на пружну напівплощину за критерієм коефіцієнта тертя між сполученими поверхнями зубчастих передач. Це дозволяє оцінити справжню навантажувальну здатність зубчастих передач при впливі різних мастильних матеріалів, що має важливе теоретичне і практичне значення при проектуванні машин і агрегатів.

Ключові слова: коефіцієнт впливу мастила, коефіцієнт тертя, контактна напруга, дотичні напруження, комплексні змінні, бігармонічна функція

CALCULATION OF TOOTHED GEAR MECHANISMS IN MACHINES AND ASSEMBLIES CONSIDERING THE EFFECT OF LUBRICANTS

B. Ahmedov

PhD, Associate Professor*

E-mail: Ahmedov.Beyali@mail.ru

A. Najafov

Doctor of Technical Sciences, Professor*

E-mail: ali.najafov@rohe.az

A. Abdullayev

Doctor of Technical Sciences, Professor*

E-mail: ayazab@aztu.edu.az

I. Chalabi

PhD, Associate Professor*

E-mail: i_tschalabi@yahoo.de

F. Veliev

Doctor of Technical Sciences, Professor

Department of technological machines and equipment of the branch

Azerbaijan State University of Economics (UNEC)

Istiglyaliyat str., 6, Baku, Azerbaijan, AZ 1001

E-mail: fazil-uzbek@mail.ru

*Department of machine design

Azerbaijan Technical University

Huseyn Javid ave., 25, Baku, Azerbaijan, AZ 1073

1. Introduction

The most common type of transmission mechanisms in machines and assemblies are the toothed gears. When transferring the torque, the engagement is exposed to the action of a normal force (F_n) and a friction force (F_f), which is associated with sliding (Fig. 1). Under the influence of these forces, the tooth enters the complex stressed state. The decisive effect on its efficiency is exerted by contact stresses (σ_H) and bending stresses (σ_F) that change over time in line with a certain intermittent cycle initiated from zero. Alternating stresses are the cause for a fatigue failure of teeth: the fracture of teeth that are exposed to the bending stresses and the spalling of working surfaces of teeth due to the contact stresses. The contact

stress and friction in the gearing are also associated with wear, seizing, and other kinds of damage to the teeth surfaces. Because the contact stresses are the cause of a fatigue failure, the basic criterion of efficiency and calculation of closed transmissions is the contact strength of teeth working surfaces ($\sigma_{H\lim}$).

However, when calculating the active surfaces of teeth for contact strength, the influence of a lubricant is almost ignored. Instead, a factor of the lubricant effect is introduced to the calculation, whose value as a random variable is accepted in most cases equal to unity. Therefore, it is a relevant and practically interesting to calculate toothed gears for contact strength of the active surfaces of teeth considering the effect of lubrication and a friction factor between the conjugated surfaces of teeth.

2. Literature review and problem statement

Paper [1] has devised a procedure for calculating the contact strength of toothed gears with respect to friction between teeth, and derived analytic expression to estimate the influence of a lubricant on their load capacity. However, the authors failed to account for the effect of the maximum shear stress on geometrical parameters of the toothed gears.

Study [2] developed a procedure for designing toothed gears, which uses maximum surface shear stresses as the estimation to assess the fatigue spalling processes. These stresses, in addition to the geometrical and mechanical parameters of toothed wheels, take into consideration the tribological properties of contact at the active surfaces of teeth. However, the geometrical parameters of a toothed gear are determined depending on the molecular effect of a friction coefficient, while the influence of the deformation action has not been studied.

Article [3] constructed an algorithm and developed software for detailed study into the impact of friction on the strength characteristics of regular toothed gears. This creates the prerequisites for taking the friction forces and load factors of the teeth into consideration in the form that most closely corresponds to actual conditions. The analysis performed shows that when taking the friction into account the dependences of forces and moments in toothed gears are the nonlinear functions that depend on the angular coordinate of the driving wheel and the current values for friction coefficients between teeth and in supports. In this case, the nature of non-linearity is determined not only by the kind of friction forces, but mainly by a change in the parameters of engagement when moving from a two-pair contact between teeth to the one-pair contact. However, the authors did not consider the influence of friction forces on load capacity of the toothed gears.

Paper [4] addressed the conditions for contact between cylindrical toothed gears, as well as the technological methods of influence when forming the involute surface of teeth, at which the teeth of one gear slip relative to the profile of the conjugated wheel and the friction-slip forces. The loss of energy for friction in the toothed gears reaches 10 % of the total energy loss to overcome friction. It is shown that in the force calculation of cylindrical toothed wheels it is necessary to take into consideration, in addition to dynamic loads, the efforts of rolling friction-slip in the toothed gears. However, the paper lacks the mechanism of influence of lubricants on load capacity of toothed gears; also, insufficiently studied is the interaction between contact-hydrodynamic parameters in terms of the friction factor.

Article [5] describes engineering methods, developed by the authors, for the calculation of geometrical parameters for a contact between smooth bodies of arbitrary shape and curvature in the presence of elastoplastic deformation in the contact area. The paper describes a procedure for applying the estimation dependences in order to solve engineering problems related to analysis, interpretation, and prediction of contact deformation at static and impact force interaction between machine components. However, the authors failed to account for the maximum shear stress associated with sliding.

Study [6] reports the necessary information about the materials and geometry of toothed gears, technological and operational requirements, disregarding which makes it impossible to perform calculations in line with

modern techniques. The peculiarities in the calculation of efficiency of toothed gears are given, with respect to the malleability of their links. However, the author did not examine the influence of a friction force on load capacity of the toothed gears.

Paper [7] describes results of the finite element calculation of the contact interaction between two elastic circular cylinders of finite length with intersecting axes as a model of contact interaction between teeth of the involute straight-tooth toothed gear when the axes of the toothed wheels are skewed. It was established that the determining factor that breaks, when skewed, the Hertz relationships between the contact parameters, and which significantly affects its load capacity, is the ratio of the summary vector of the assigned load to the length of the contact area in the direction of forming cylinders. However, the simultaneous action of normal and tangential forces, associated with the relative sliding of teeth, was not considered in the paper.

Study [8] dealt with issues related to ensuring the resistance to the contact fatigue in the highly stressed toothed wheels in the transmissions of auto tractor vehicles. The influence of the microstructure of strengthened surface layers on resistance to the contact fatigue of cemented toothed wheels is shown. There is a procedure for the calculation and prediction of the toothed wheels' resource with respect to the quality of the structure of strengthened layers. The authors considered methods for determining the hardenability of cemented construction steels. They gave recommendations for choosing rational parameters for the technological regimes in the chemical-thermal treatment of toothed wheels in energy-intensive machines with high performance characteristics. However, the authors failed to study the stressed-deformed state of toothed gears when there is friction between the teeth of toothed gears.

Paper [9] provides the basic concepts of the mathematical theory of elasticity, and derives complete systems of equations, as well as proves the assumptions on these equations. In [10, 11, 14–17], there are basic data on the calculation and design of toothed gears and their components based on the main criteria for their operation efficiency. Studies [12, 13] report results obtained in the course of experimental study on the evaluation of influence of various parameters on a friction coefficient.

Paper [18] gives a comparative estimation of the service life of cylindrical toothed gears based on the two basic criteria of efficiency – the contact and flexural strength of teeth. However, the author did not study the influence of lubrication on load capacity of the toothed gears.

In works [19–21], in order to determine a factor of influence of lubrication K_L on contact endurance of the active surfaces of teeth, a probabilistic calculation method was employed. However, only the mathematical expectation and the variance coefficient K_L were taken into consideration rather than the estimation of the factor itself.

Thus, the issues on the influence of friction force on load capacity of the toothed gears under the influence of various lubricants remain to be solved.

3. The aim and objectives of the study

The aim of this work is to devise a procedure for calculating the toothed gears for contact strength with respect to friction between the teeth and the influence of lubrication.

To accomplish the aim, the following tasks have been set:

- to reveal the mechanics of change in shapes and dimensions in a contact between two bodies of arbitrary shape, close to half-planes;

- to solve a boundary problem on the pressure of a rigid stamp on the elastic half-plane in the presence of friction;
- to derive a holomorphic relationship between a contact stress and a friction coefficient;
- to derive an analytical expression to estimate the influence of a lubricant on the load capacity of toothed gears for contact stresses.

4. A problem on the contact between two bodies in the shape of half-planes given the finite friction coefficient

The existing calculation procedure for toothed gears in terms of contact stresses is based on the Hertz formula, derived from the solution to the contact problem from elasticity theory under certain restrictive assumptions:

- the area of contact between surfaces is very small;
- the friction coefficient between the conjugated surfaces is zero;
- given the appropriate choice of coordinate axes, the equations of non-deformed surfaces in the vicinity of a contact place can be at sufficient approximation represented in the form

$$z = Ax^2 + 2Bxy + Cy^2.$$

This paper examines the issue on solving the problem on the contact of two bodies of arbitrary shape, close to half-planes. When transferring the torque, the engagement is exposed to the action of a normal force (F_n) and a friction force (F_f), which is associated with sliding. Friction force occurs when the toothed wheels' wheel profiles slide relative to each other. At the engagement pole, the friction forces are zero, but at the stem and top of the teeth they are maximal. Therefore, a slip velocity is proportional to the distance between the contact point and the pole. The sliding is accompanied by friction. Friction causes losses in the engagement and leads to tooth wear.

In the drive teeth, friction forces are directed from the initial circle, and in the driven ones – vice versa. At the constant diameters of wheels, the distance between the points of start and end of the engagement and the pole, and hence the slip velocity, increases with an increase in the height of the tooth or the engagement module. The low-module wheels with a larger number of teeth the sliding is smaller while the performance efficiency is higher than that of the large-module wheels with a small number of teeth.

Therefore, taking into consideration the presence of lubrication and friction at the conjugated teeth surfaces, the refined solution to the problem on contact between two bodies in the shape of half-planes at the finite friction coefficient is of practical importance.

In this case, the stated problem is a two-dimensional analog of the Hertz problem without assumptions about the smallness of the contact area and the shape of borders [9].

It is known that the load permissible in terms of the contact strength of teeth of the toothed wheels is defined basically by the hardness of a material. For a better joint work of teeth, it is typically recommended to assign the hardness

of a gear that would exceed the wheel's hardness by not less than 10–15 Brinell units [10, 11]

$$HB_1 \geq HB_2 + (10 \dots 15). \quad (1)$$

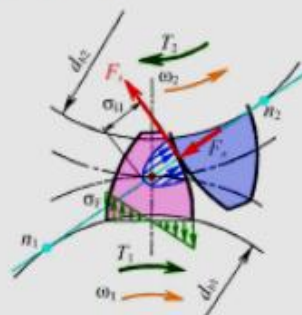


Fig. 1. Forces that act in the engagement of toothed wheels' teeth

This circumstance makes it possible to consider the conjugation of the surfaces of teeth of toothed wheels as the two elastic bodies (S_1 and S_2), similar in their shape to half-planes, which are in contact along sections "ab" (Fig. 2). The upper and bottom neighborhoods are to be distinguished by signs (+) and (–), respectively.

It is believed that the predefined or known conditions are the following:

- the shape of borders prior to deformation;
- the principal vector of external forces that pressed body S_1 to body S_2 ;
- strains and rotations of S_1 and S_2 at infinity are zero;
- coefficient of friction between the conjugated surfaces is non-zero, and has the finite value f ;
- the section of contact ab is to be determined;
- body S_1 takes the lower half-plane, and body S_2 the upper one S^* .

Assume that at the border of the elastic half-plane, beneath the surface of the gear's tooth (stamp)

$$\tau = f \cdot q, \quad (2)$$

where q is the specific pressure; τ is the shear stress; f is the friction coefficient, considered constant.

Direct the Ox axis along the border of the elastic half-plane, and the Oy axis – perpendicular to it, so that the elastic body takes the lower half-plane $y < 0$. It is obvious that with this choice of axes

$$q = -y''; \quad \tau = X''_y. \quad (3)$$

It is expected that the gear's tooth (stamp) comes into contact with a tooth of the wheel (elastic half-plane) along one continuous section $L = ab$ and can move only translationally.

It is considered that the assigned magnitude of the total pressure of a gear's tooth (stamp) at the surface of the tooth of the wheel (half-plane)

$$q_0 = \int_1 q(t) dt, \quad (4)$$

In this case, the total tangential stress is, obviously, $\tau_x = f \cdot q_x$; the principal vector of external forces acting on

the gear's tooth (stamp) and balanced by the reaction of the tooth (elastic half-plane) is

$$(F_x, F_y) = (\tau_0 - q_0).$$

We believe that bodies S_1 and S_2 are matched with complex variable functions $\Phi_1(z)$ and $\Phi_2(z)$. The boundary conditions of our problem then take the form [1], [9]:

$$\left. \begin{aligned} \tau(t) &= f q(t) && \text{on } L, \\ v &= f(t) + \text{const} && \text{on } L, \\ \tau(t) &= q(t) = 0 && \text{on } OX, \end{aligned} \right\} \quad (5)$$

where t is the abscissa of the point along the Ox ; v is the projection of displacement onto the Oy ; $f(t)$ is the assigned function that defines the gear's tooth profile (stamp); $y = f(x)$ is the equation of the tooth's profile.

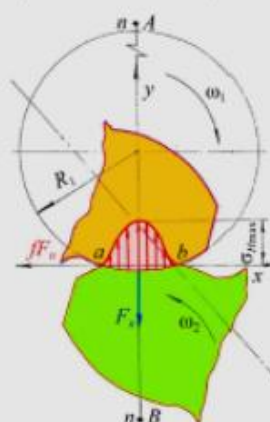


Fig. 2. Estimation scheme to build the refined method for calculating toothed gears in terms of contact strength

Next, the biharmonic function $U(x, y)$ of two variables x and y is represented by means of two functions of the complex variable

$$z = x + iy \text{ and } \bar{z} = x - iy.$$

In this case, the equilibrium equation takes the form

$$\begin{aligned} \frac{\partial U}{\partial z} &= \frac{\partial U}{\partial x} \frac{\partial x}{\partial z} + \frac{\partial U}{\partial y} \frac{\partial y}{\partial z} = \frac{1}{2} \left(\frac{\partial}{\partial x} - i \frac{\partial}{\partial y} \right) U, \\ \frac{\partial U}{\partial \bar{z}} &= \frac{1}{2} \left(\frac{\partial}{\partial x} + i \frac{\partial}{\partial y} \right) U. \end{aligned} \quad (6)$$

For x and y

$$\begin{aligned} \frac{\partial U}{\partial x} &= \left(\frac{\partial}{\partial z} + i \frac{\partial}{\partial \bar{z}} \right) U, \\ \frac{\partial U}{\partial y} &= \left(\frac{\partial}{\partial z} - i \frac{\partial}{\partial \bar{z}} \right) U. \end{aligned} \quad (7)$$

The consequence of these formulae is the expression of second derivatives, the Laplacian and the biharmonic operator

$$\left. \begin{aligned} \frac{\partial^2 U}{\partial x^2} &= \left(\frac{\partial^2}{\partial z^2} + 2 \frac{\partial^2}{\partial z \partial \bar{z}} + \frac{\partial^2}{\partial \bar{z}^2} \right) U, \\ \frac{\partial^2 U}{\partial y^2} &= - \left(\frac{\partial^2}{\partial z^2} - 2 \frac{\partial^2}{\partial z \partial \bar{z}} + \frac{\partial^2}{\partial \bar{z}^2} \right) U, \\ \frac{\partial^2 U}{\partial x \partial y} &= i \left(\frac{\partial^2}{\partial z^2} - \frac{\partial^2}{\partial \bar{z}^2} \right) U, \\ \nabla^2 U &= 4 \frac{\partial^2 U}{\partial z \partial \bar{z}}, \\ \nabla^4 U &= 16 \frac{\partial^4 U}{\partial z^2 \partial \bar{z}^2}. \end{aligned} \right\} \quad (8)$$

With respect to displacement vectors

$$\begin{aligned} \nabla^2 U &= 4 \frac{\partial^2 U}{\partial z \partial \bar{z}}, \\ \nabla^2 U + it &= 4 \psi(z), \quad \nabla^2 U - it = 4 \overline{\psi(z)} \end{aligned}$$

from these equations

$$\frac{1}{2} \nabla^2 U = 2 \frac{\partial^2 U}{\partial z \partial \bar{z}} = \psi(z) + \overline{\psi(z)}.$$

The integration for z , that introduces the additively in-bound function from \bar{z} , denoted as $\chi'(z)$, produces

$$2 \frac{\partial U}{\partial z} = \psi(z) + \overline{\psi(z)} + \overline{\chi'(z)}.$$

Another integration leads to the desired representation

$$2U = \bar{z} \psi(z) + z \overline{\psi(z)} + \overline{\chi'(z)} + \chi'(z).$$

The function, introduced to the right side while integrating for \bar{z} , is equal to $\chi'(z)$, because U is the real function. Then

$$U = \frac{1}{2} \left[\bar{z} \psi(z) + z \overline{\psi(z)} + \chi'(z) + \overline{\chi'(z)} \right]. \quad (9)$$

This formula was first given by Goursat. Hereafter, we shall use for function U another expression, the expressions for its partial derivatives.

It is easily calculated

$$\left. \begin{aligned} 2 \frac{\partial U}{\partial x} &= \psi(z) + \bar{z} \psi'(z) + \overline{\psi(z)} + z \overline{\psi'(z)} + \chi'(z) + \overline{\chi'(z)}, \\ 2 \frac{\partial U}{\partial y} &= i \left[-\psi(z) + \bar{z} \psi'(z) + \overline{\psi(z)} - z \overline{\psi'(z)} + \chi'(z) - \overline{\chi'(z)} \right]. \end{aligned} \right\} \quad (10)$$

Instead of considering expressions for $\frac{\partial U}{\partial x}$ and $\frac{\partial U}{\partial y}$, it is more convenient to consider the expression for complex combination

$$\frac{\partial U}{\partial x} + i \frac{\partial U}{\partial y} = \psi(z) + z \overline{\psi'(z)} + \overline{\varphi(z)}, \quad (11)$$

here for brevity we put it as

$$\varphi(z) = \frac{d\chi}{dz}.$$

It should be noted that any expression of the form (9) represents a biharmonic function if $\psi(z)$ and $\chi(z)$ are the holomorphic functions of the complex variable z .

Indeed, by differentiating the first equation (10) for x and the second one for y and summing, we obtain

$$\Delta U = 2[\psi'(z) + \overline{\psi'(z)}] = 4\operatorname{Re}[\psi'(z)], \quad (12)$$

hence it follows that ΔU is the harmonic function. Therefore,

$$\Delta^2 U = \Delta(\Delta U) = 0.$$

Under effort $(X_n ds, Y_n ds)$, acting on element ds of the contour's arc ab from the side of a positive normal $(X_n ds, Y_n ds)$:

$$\left. \begin{aligned} X_n &= X_x \cos(n, x) + X_y \cos(n, y) = \\ &= -\frac{\partial^2 U}{\partial y^2} \cos(n, x) - \frac{\partial^2 U}{\partial x \partial y} \cos(n, y), \\ Y_n &= Y_x \cos(n, x) + Y_y \cos(n, y) = \\ &= \frac{\partial^2 U}{\partial y^2} \cos(n, y) - \frac{\partial^2 U}{\partial x \partial y} \cos(n, x). \end{aligned} \right\} \quad (13)$$

One can easily see

$$\cos(n, x) = \cos(t_0, y) = \frac{dy}{ds},$$

$$\cos(n, y) = -\cos(t_0, x) = -\frac{dx}{ds},$$

where t_0 is the positive direction of the tangent. By introducing these values to (13), we obtain the abscissa of the point along axis Ox :

$$X_n = \frac{d}{ds} \left(\frac{\partial U}{\partial y} \right), \quad Y_n = -\frac{d}{ds} \left(\frac{\partial U}{\partial x} \right), \quad (14)$$

or, in the complex form

$$X_n + iY_n = \frac{d}{ds} \left(\frac{\partial U}{\partial y} - i \frac{\partial U}{\partial x} \right) = -i \frac{d}{ds} \left(\frac{\partial U}{\partial x} + i \frac{\partial U}{\partial y} \right) \quad (15)$$

or

$$(X_n + iY_n)ds = -id \left(\frac{\partial U}{\partial x} + i \frac{\partial U}{\partial y} \right). \quad (16)$$

With respect to this expression in formula (15), we obtain

$$(X_n + iY_n)ds = -id [\psi'(z) + \overline{\psi'(z)} + \overline{\varphi'(z)}]. \quad (17)$$

If we give the element ds , first, the direction of axis Oy , and then the direction of axis Ox , we obtain

$$ds = dy, \quad dz = idy, \quad d\bar{z} = -idy, \quad X_n = X, \quad Y_n = X_y,$$

$$ds = dx, \quad dz = d\bar{z} = dx, \quad X_n = -X_y, \quad Y_n = -Y_x.$$

$$X_x + iX_y = \psi'(z) + \overline{\psi'(z)} - \overline{z\psi''(z)} - \overline{\varphi'(z)}, \quad (18)$$

$$Y_x - iY_y = \psi'(z) + \overline{\psi'(z)} + z\psi''(z) + \overline{\varphi'(z)}. \quad (19)$$

Adding and subtracting equations (18) and (19), and replacing in the second result i with $-i$, we obtain

$$\begin{aligned} X_x + Y_y &= 2[\psi'(z) + \overline{\psi'(z)}] = 4\operatorname{Re}\psi'(z) = \\ &= 4\operatorname{Re}\Phi(z) = 2[\Phi(z) + \overline{\Phi(z)}], \end{aligned} \quad (20)$$

$$\begin{aligned} Y_y - X_x + 2iX_y &= 2[\overline{z\psi''(z)} + \overline{\varphi'(z)}] = \\ &= 2[(\overline{z} - z)\Phi'(z) - \Phi(z) - \overline{\Phi(z)}], \end{aligned} \quad (21)$$

$$Y_y - iX_y = \Phi(z) - \Phi(\overline{z}) + (z - \overline{z})\overline{\Phi'(z)}. \quad (22)$$

The principal vector (resultant force) acting on the finite arc ab , and the main moment (M) of the examined efforts relative to the coordinate origin, take the form:

$$\begin{aligned} X + iY &= \int_{ab} (X_n + iY_n)ds = \\ &= -i \left[x \frac{\partial U}{\partial x} + i \frac{\partial U}{\partial y} \right]_a^b = -i [\psi(z) + \overline{z\psi'(z)} + \overline{\varphi(z)}]_a^b, \end{aligned} \quad (23)$$

$$M = \int_{ab} (xY_n - yX_n)ds = - \int_{ab} \left\{ x \frac{\partial U}{\partial x} + y \frac{\partial U}{\partial y} \right\},$$

hence, by integrating by parts, we find:

$$\begin{aligned} M &= - \left[x \frac{\partial U}{\partial x} + y \frac{\partial U}{\partial y} \right]_a^b + \int_{ab} \left\{ \frac{\partial U}{\partial x} dx + \frac{\partial U}{\partial y} dy \right\} = \\ &= - \left[x \frac{\partial U}{\partial x} + y \frac{\partial U}{\partial y} \right]_a^b + [U]_a^b. \end{aligned} \quad (24)$$

Note

$$x \frac{\partial U}{\partial x} + y \frac{\partial U}{\partial y} = \operatorname{Re} \left\{ z \left(\frac{\partial U}{\partial x} - i \frac{\partial U}{\partial y} \right) \right\},$$

$$\frac{\partial U}{\partial x} - i \frac{\partial U}{\partial y} = \overline{\psi'(z)} + \overline{z\psi''(z)} + \overline{\varphi'(z)}$$

and

$$U = \operatorname{Re} [\overline{z\psi(z)} + \chi(z)]$$

then we finally obtain

$$M = \operatorname{Re} [\chi(z) - z\varphi(z) - \overline{z \cdot \overline{z\psi'(z)}}]_a^b. \quad (25)$$

In order to express the stress and displacement components in the integrated form, we apply the following formula

$$2\mu^*(u + iv) = - \left(\frac{\partial U}{\partial x} - i \frac{\partial U}{\partial y} \right) + \frac{2(\lambda^* + 2\mu^*)}{\lambda^* + \mu^*} \psi(z), \quad (26)$$

according to formula (11)

$$2\mu^*(u + iv) = \chi^*(z) - \Phi(z) - \Phi(\overline{z}) - (z - \overline{z})\overline{\Phi'(z)}, \quad (27)$$

where

$$\chi^* = \frac{\lambda^* + 3\mu^*}{\lambda^* + \mu^*} = 3 - 4\nu,$$

μ^*, λ^* are the first and second Lamé parameters:

$$\lambda^* = \frac{\nu E}{(1+\nu)(1-2\nu)},$$

$$\mu^* = \frac{E}{2(1+\nu)}$$

(here: E is the Young modulus, ν is the Poisson ratio).

At the above assumptions and denotations, the boundary conditions (5) can be recorded as:

$$\left. \begin{aligned} (1-if)\Phi^+(t) + (1+if)\bar{\Phi}^+(t) = \\ = (1-if)\Phi^-(t) + (1+if)\bar{\Phi}^-(t), \\ \chi^*\Phi^-(t) + \Phi^+(t) - \chi^*\bar{\Phi}^+(t) - \bar{\Phi}^-(t) = 4i\mu^*f'(t). \end{aligned} \right\} \quad (28)$$

The first equation in the system of equations (28) shows that the function

$$(1-if)\Phi(z) + (1+if)\bar{\Phi}(z)$$

is holomorphic over the entire plane and, since it must vanish at infinity, then over the entire plane

$$(1-if)\Phi(z) + (1+if)\bar{\Phi}(z) = 0. \quad (29)$$

By expressing $\bar{\Phi}(z)$ via $\Phi(z)$ and introducing (28) to the second equation (28), we obtain the boundary condition for $\Phi(z)$

$$\Phi^+(t) = g\Phi^-(t) + f_0(t), \quad (30)$$

where

$$g = -\frac{\chi^* + 1 + if(\chi^* - 1)}{\chi^* + 1 - if(\chi^* - 1)},$$

$$f_0(t) = \frac{4i\mu^*(1+if)f'(t)}{\chi^* + 1 - if(\chi^* - 1)},$$

noting that $\chi^* > 1$ and $f > 0$, the previous expressions can be simplified by introducing a constant α^* , defined from conditions

$$\alpha^* = \frac{1}{\pi} \arctg \left(f \frac{\chi^* - 1}{\chi^* + 1} \right), \quad 0 \leq \alpha^* \leq 0.5. \quad (31)$$

Then

$$\begin{aligned} \chi^* + 1 \pm if(\chi^* - 1) = \\ = \sqrt{(\chi^* + 1)^2 + f^2(\chi^* - 1)^2} e^{\pm i \arctg \frac{f(\chi^* - 1)}{\chi^* + 1}} = \frac{(\chi^* + 1)e^{\pm i \arctg \frac{f(\chi^* - 1)}{\chi^* + 1}}}{\cos \pi \alpha^*}, \end{aligned}$$

and, consequently,

$$g = -e^{2i\pi\alpha^*},$$

$$f_0(t) = \frac{4i\mu^*(1+if)f'(t)e^{i\pi\alpha^*} \cos \pi \alpha^*}{\chi^* + 1} f'(t). \quad (32)$$

From the accepted condition ($0 \leq c \leq 1$, where c is a positive constant) one must take the value of the logarithm for which

$$0 \leq \operatorname{Re} \frac{\ln g}{2\pi i} < 1.$$

Hence, for condition $e^{2i\pi\gamma} = g$

$$\gamma = \frac{\ln g}{2\pi i} = \frac{1}{2} + \alpha^*. \quad (33)$$

To solve this problem, we shall apply the Cauchy-type integral

$$F_0(z) = \frac{1}{2\pi i} \int_a^b \frac{f(t)dt}{t-z}, \quad (34)$$

where $F_0(z)$ is a piecewise holomorphic function. According to the Liouville's theorem, $F(z) = C = \text{const}$ in all planes. Then the general solution to the problem is determined in the form $F(z) = F_0(z) + C$, meaning

$$F(z) = \frac{1}{2\pi i} \int_a^b \frac{f(t)dt}{t-z} + C, \quad (35)$$

where $f(t)$ denotes a surge $F(z)$ along the line of surges L , that is

$$f(t) = F^+(t) - gF^-(t), \quad (36)$$

and C is a constant.

If the pole of an arbitrary order is at infinity, the particular solution to problem $X_0(z)$ can be found from the following equation

$$X_0(z) = \sum_{j=1}^n (z-a_j)^{-\gamma} (z-b_j)^{-1}. \quad (37)$$

If we trace the evolution of argument $z-a_n$, or $z-b_n$, when z originates from point t of the arc, $a_n b_n$ describes a closed path consisting of the lengths of arcs of the upper and lower half-planes

$$\left. \begin{aligned} X_0^-(t) &= e^{-2i\pi\gamma} X_0^+(t), \\ X_0^+(t) &= e^{2i\pi\gamma} X_0^-(t). \end{aligned} \right\} \quad (38)$$

For the solution to the homogeneous problem, which may have a pole at infinity, the function $X_0(z)$ must satisfy condition [9]

$$X_0^+(t) = gX_0^-(t),$$

hence

$$g = \frac{X_0^+(t)}{X_0^-(t)}.$$

By introducing this expression to boundary condition (36), we obtain

$$\frac{F^+(t)}{X_0^+(t)} - \frac{F^-(t)}{X_0^-(t)} = \frac{f(t)}{X_0^+(t)}.$$

Then

$$F(z) = \frac{X_0(z)}{2\pi i} \int_a^b \frac{f(t)dt}{X_0^*(t)(t-z)} + C_0 X_0(z). \quad (39)$$

In this formula, expression $(z-a)^{\frac{1}{2}\alpha^*}(b-z)^{\frac{1}{2}\alpha^*}$ could be taken as the function $X_0(z)$

$$\begin{aligned} \Phi(z) = & \frac{2\mu^*(1+if)e^{i\pi\alpha^*} \cos \pi\alpha}{\pi(\chi^*+1)(z-a)^{\frac{1}{2}\alpha^*}(b-z)^{\frac{1}{2}\alpha^*}} \times \\ & \times \int_a^b \frac{(t-a)^{\frac{1}{2}\alpha^*}(b-t)^{\frac{1}{2}\alpha^*}}{t-z} f'(t)dt + \\ & + \frac{C_0}{(z-a)^{\frac{1}{2}\alpha^*}(b-z)^{\frac{1}{2}\alpha^*}}, \end{aligned} \quad (40)$$

where C_0 is a constant, and $(z-a)^{\frac{1}{2}\alpha^*}(b-z)^{\frac{1}{2}\alpha^*}$ implies a branch, holomorphic outside segment ab and acquiring on the upper side of this segment the valid positive values $(t-a)^{\frac{1}{2}\alpha^*}(b-t)^{\frac{1}{2}\alpha^*}$. The specified branch is characterized by

$$\lim_{z \rightarrow \infty} \frac{(z-a)^{\frac{1}{2}\alpha^*}(b-z)^{\frac{1}{2}\alpha^*}}{z} = -ie^{i\pi\alpha^*}.$$

The constant C_0 is determined from formula

$$\lim_{z \rightarrow \infty} z\Phi(z) = \frac{-T_0 + iP_0}{2\pi} = \frac{iP_0(1+if)}{2\pi},$$

hence

$$C_0 = \frac{P_0(1+if)e^{i\pi\alpha^*}}{2\pi}.$$

Formula (40) then takes the form

$$\begin{aligned} \Phi(z) = & \frac{2\mu^*(1+if)e^{i\pi\alpha^*} \cos \pi\alpha}{\pi(\chi^*+1)(z-a)^{\frac{1}{2}\alpha^*}(b-z)^{\frac{1}{2}\alpha^*}} \times \\ & \times \int_a^b \frac{(t-a)^{\frac{1}{2}\alpha^*}(b-t)^{\frac{1}{2}\alpha^*}}{t-z} f'(t)dt + \\ & + \frac{P_0(1+if)e^{i\pi\alpha^*}}{2\pi(z-a)^{\frac{1}{2}\alpha^*}(b-z)^{\frac{1}{2}\alpha^*}}. \end{aligned} \quad (41)$$

Pressure $q(t)$ at points t_0 of the gear's tooth (stamp) is determined based on formula (22)

$$q(t_0) + i\tau(t_0) = q(t_0)(1+if) = \Phi^+(t_0) - \Phi^-(t_0). \quad (42)$$

By computing the last difference based on the Satchsky-Plemel formulae, we obtain the refined expression to determine the contact stress:

$$\begin{aligned} q(t_0) = \sigma_{H\max}(t_0) = & -\frac{4\mu^* \sin(\pi\alpha^*) \cos(\pi\alpha^*)}{\chi^*+1} f'(t_0) + \\ & + \frac{P_0 \cos(\pi\alpha^*)}{\pi(t_0-a)^{\frac{1}{2}\alpha^*}(b-t_0)^{\frac{1}{2}\alpha^*}} = \frac{4\mu^* \cos^2(\pi\alpha^*)}{\pi(\chi^*+1)(t_0-a)^{\frac{1}{2}\alpha^*}(b-t_0)^{\frac{1}{2}\alpha^*}} \times \\ & \times \int_a^b \frac{(t-a)^{\frac{1}{2}\alpha^*}(b-t)^{\frac{1}{2}\alpha^*}}{t-t_0} f'(t)dt. \end{aligned} \quad (43)$$

It is obvious that when $f=0$ (then $\alpha^*=0$) we obtain a solution for the perfect case where there is no friction between the surfaces conjugated.

To determine distance ab , we apply the following formula [9]

$$\int_a^b \frac{tf'(t)dt}{\sqrt{(t-a)(b-t)}} = KP_0, \quad (44)$$

where P_0 is the magnitude of the principal vector of external forces that press a gear to the wheel.

If function $f(t)$ is even, that is $f(-t)=f(t)$, then, for reasons of symmetry, we can take $a=-l$ and $b=l$, in advance, where l is determined from the following ratio

$$\int_0^l \frac{tf'(t)dt}{\sqrt{l^2-t^2}} = \frac{1}{2}K^*P_0, \quad (45)$$

where

$$K^* = \frac{\chi_1+1}{4\mu_1} + \frac{\chi_2+1}{4\mu_2}$$

is the all-side compression module.

For

$$\chi_1 = \chi_2 = \chi^* \text{ and } \mu_1 = \mu_2 = \mu^*$$

$$\begin{aligned} K^* = \frac{\chi+1}{2\mu} = \frac{2(1-\nu)}{\mu} = \frac{2(1-\nu)}{\frac{E}{2(1+\nu)}} = \\ = \frac{4(1-\nu^2)}{\frac{2E_1E_2}{E_1+E_2}} = \frac{2(1-\nu^2)(E_1+E_2)}{E_1E_2}. \end{aligned}$$

Then

$$\int_0^l \frac{tf'(t)dt}{\sqrt{l^2-t^2}} = (1-\nu^2) \frac{E_1+E_2}{E_1E_2} P_0. \quad (46)$$

If the body of the teeth is limited by circles of radii R_1 and R_2 , larger in comparison with the contact areas, then, believing

$$f(t) = \frac{t^2}{2} \left(\frac{1}{R_1} + \frac{1}{R_2} \right) = \frac{t^2}{2\rho_r}, \quad (47)$$

we obtain solution (43) in the form

$$\begin{aligned} \sigma_{H\max}(t_0) = & \frac{\cos^2(\pi\alpha^*)}{\pi k^* l} \times \\ & \times \frac{1}{\rho_r} \int_a^b \frac{\sqrt{l^2-t^2}}{t-t_0} \left(\frac{l+t}{l-t} \right)^{\alpha^*} dt + P_0 \frac{\cos(\pi\alpha^*)}{\pi l}, \end{aligned} \quad (48)$$

where

$$k^* = \frac{2(1-\nu^2)}{E_r}. \quad (49)$$

The integral in this formula is not expressed by a combination of elementary functions and, therefore, we represent it in the form of a Taylor series

$$\left(\frac{l+t}{l-t}\right)^{\alpha^*} = 1 + \frac{2\alpha^*}{l}t + \frac{2\alpha^{*2}}{l^2}t^2 + \frac{2(2\alpha^{*3} + \alpha^*)}{3l^3}t^3 \dots \quad (50) \quad \text{where}$$

Then

$$\int_0^l \sqrt{l^2 - t^2} \left(\frac{l+t}{l-t}\right)^{\alpha^*} dt = \pi l^2 \left(\frac{1}{4} + \frac{\alpha^{*2}}{8} + \frac{2\alpha^*}{3\pi} + \frac{4(\alpha^* + 2\alpha^{*3})}{45\pi} \right). \quad (51)$$

By introducing the latter to (48) to determine the greatest value of the contact stress, we obtain the following formula:

$$\begin{aligned} \sigma_{H\max}(t_0) &= \frac{\cos^2(\pi\alpha^*)}{\pi k^* l} \frac{1}{\rho_r} \pi l^2 \times \\ &\times \left(\frac{1}{4} + \frac{\alpha^{*2}}{8} + \frac{2\alpha^*}{3\pi} + \frac{4(\alpha^* + 2\alpha^{*3})}{45\pi} \right) + P_0 \frac{\cos(\pi\alpha^*)}{\pi l} = \\ &= \frac{\cos^2(\pi\alpha^*)}{k^*} \frac{l}{\rho_r} \left(\frac{1}{4} + \frac{\alpha^{*2}}{8} + \frac{2\alpha^*}{3\pi} + \frac{4(\alpha^* + 2\alpha^{*3})}{45\pi} \right) + \\ &+ P_0 \frac{\cos(\pi\alpha^*)}{\pi l}. \end{aligned} \quad (52)$$

In equation (45)

$$f'(t) = (f(t))' = \frac{t}{\rho_r}. \quad (53)$$

With respect to equation (45) and (47) in equation (44), we obtain

$$\frac{1}{\rho_r} \int_0^l \frac{t^2 dt}{\sqrt{l^2 - t^2}} = (1 - \nu^2) \frac{P_0}{E_r}. \quad (54)$$

By substituting in this equation

$$t = l \sin x \quad \text{and} \quad dt = l \cos x dx,$$

we obtain

$$\sqrt{l^2 - t^2} = l \cos x, \quad x = \arcsin \frac{t}{l},$$

$$t = 0 \Rightarrow x = 0; \quad t = l \Rightarrow x = \frac{\pi}{2}.$$

Then

$$\frac{1}{\rho_r} \int_0^l \frac{t^2 dt}{\sqrt{l^2 - t^2}} = (1 - \nu^2) \frac{P_0}{E_r},$$

hence, we determine

$$l = 2 \sqrt{\frac{(1 - \nu^2) P_0 \rho_r}{\pi E_r}}. \quad (55)$$

Employing formulae (49), (55) in (52), we come to the following value:

$$\begin{aligned} \sigma_{H\max}(t_0) &= \frac{\cos^2(\pi\alpha^*)}{k^*} \frac{l}{\rho_r} \left(\frac{1}{4} + \frac{\alpha^{*2}}{8} + \frac{2\alpha^*}{3\pi} + \frac{4(\alpha^* + 2\alpha^{*3})}{45\pi} \right) + P_0 \frac{\cos(\pi\alpha^*)}{\pi l} = \\ &= \left[\sqrt{2} \cos^2(\pi\alpha^*) \left(\frac{1}{4} + \frac{\alpha^{*2}}{8} + \frac{2\alpha^*}{3\pi} + \frac{4(\alpha^* + 2\alpha^{*3})}{45\pi} \right) + \frac{1}{\sqrt{2}} \cos(\pi\alpha^*) \right] \sigma_H \leq [\sigma]_{\text{H}}, \end{aligned}$$

$$\sigma_H = \sqrt{\frac{P_0 E_r}{2\pi(1 - \nu^2)\rho_r}},$$

is the known Hertz solution [11, 14–17].

It should be noted that at $\alpha^* = 0$ ($f = 0$) or $t_0 = 0$, the refined solution to the problem exceeds the known Hertz solution by 6 %, that is

$$\sigma_{H\max}(t_0) = \frac{3\sqrt{2}}{4} \sigma_H = 1,06 \sigma_H.$$

5. Quantitative evaluation of the influence of a lubricant on load capacity of toothed gears

To quantify the effect of a lubricant on load capacity of the toothed gears, we compare values for the largest contact stress with its permissible value

$$\begin{aligned} &\left[\sqrt{2} \left(\frac{1}{4} + \frac{\alpha^{*2}}{8} + \frac{2\alpha^*}{3\pi} + \frac{4(\alpha^* + 2\alpha^{*3})}{45\pi} \right) \cos^2(\pi\alpha^*) + \right. \\ &\left. + \frac{1}{\sqrt{2}} \cos(\pi\alpha^*) \right] \sigma_H \leq \\ &\leq \frac{\sigma_{H\lim} Z_N}{S_{H\min}} Z_R Z_v Z_L Z_X Z_w, \end{aligned} \quad (57)$$

where $\sigma_{H\lim}$ is the limit of contact resistance of the teeth surfaces corresponding to the basis number of stress cycles; $S_{H\min}$ is the minimum factor of safety; Z_N is a durability factor; Z_R is a coefficient that takes into consideration the influence of the initial roughness of the conjugated teeth surfaces; Z_v is a coefficient that takes into consideration the influence of circumferential speed; Z_L is a coefficient that takes into consideration the influence of a lubricant; Z_X is a coefficient that takes account the size of the toothed wheel; Z_w is a coefficient that takes into consideration the influence of difference in the hardness of materials of the conjugated surfaces of teeth.

By comparing the left and right sides of this expression, rejecting the terms of the second order of smallness, we obtain an expression to determine the coefficient of influence of a lubricant

$$Z_L = \frac{1}{\sqrt{2}} \left[(0,5 + 0,48\alpha^* + 0,25\alpha^{*2} + 0,11\alpha^{*3}) \times \right. \\ \left. \times \cos^2(\pi\alpha^*) + \cos(\pi\alpha^*) \right] \quad (58)$$

Based on an analysis of expression (31), it was established that $\alpha^* \approx f$. Taking this fact into consideration, after the expansion of $\cos(\pi\alpha^*)$ into a Taylor power series, with some simplifications, we obtain the following analytical expression for the coefficient of influence of a lubricant

$$\begin{aligned} Z_L &= \\ &= 12,575(f - 0,732645)(f - 0,467789) \times \\ &\times (0,24607 + 0,940553f + f^2). \end{aligned} \quad (59)$$

Based on the experimental study, carried out at the authors' highly sensitive roller in-

stallation that makes it possible to evaluate impact of the contact parameters on a friction coefficient, we obtained an empirical expression for the coefficient of friction. In this case, we used lubricants of the oil brands MS-20, MC-22, TP-46, TP-30, TP-22, I-40A, I-30A, and I-20A [12]:

$$f = 0,5215 \cdot 10^{-4} \frac{(1 - 0,065V_0)R_a}{\sigma_H^{0,223} \sqrt{0,3V_0^{0,334}} \rho_r}, \quad (60)$$

where σ_H is the contact stress, MPa; v is the kinematic viscosity of oil, m^2/s ; V_0 is the total rolling speed, m/s ; V_1 is the slip velocity, m/s ; R_a is the arithmetic mean deviation of the profile within the basic length, m ; ρ_r is the reduced radius of the surfaces' curvature, m .

It is obvious that the less f , the larger Z_L as well as the related load-bearing capacity. An argument in favor of this conclusion is that the coefficient Z_L is directly included in the formula for calculating the contact endurance of the active surfaces of teeth – dependences (57), (63), (64), (67) – that affects load capacity of the toothed gears for a contact endurance criterion. For clarity, Fig. 3 shows a graph of dependence of a lubricant influence coefficient on the friction coefficient, calculated from formula (60).

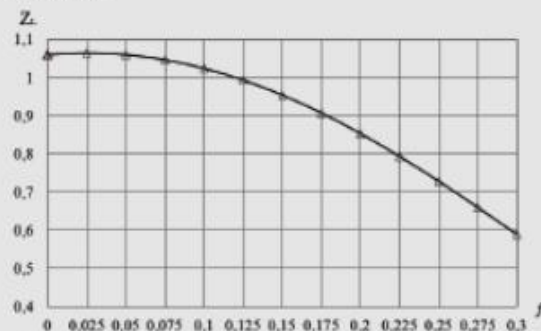


Fig. 3. Dependence graph of a lubricant influence coefficient on friction coefficient

After substituting (60) in (59) and some transforms, we obtain the analytical dependence of a lubricant influence coefficient on contact parameters

$$Z_L = 1,0605 + 0,177 \cdot 10^{-4} \frac{(1 - 0,065V_0)R_a}{\sigma_H^{0,223} \sqrt{0,3V_0^{0,334}} \rho_r} \times \left(1 - 10,45 \cdot 10^{-2} \frac{(1 - 0,065V_0)R_a}{\sigma_H^{0,223} \sqrt{0,3V_0^{0,334}} \rho_r} \right). \quad (61)$$

Thus, the lubricant influence coefficient Z_L is linked in the general case to the contact stress, kinematic viscosity of oil, the roughness of surfaces, the total rolling speed, sliding speed and the reduced radius of curvature.

Study results show that the influence of a friction coefficient on the lubricant influence coefficient and related load bearing capacity of the toothed gear is significant [13]. The proposed procedure makes it possible to solve the inverse problem: knowing the kinematical and energy parameters of toothed gears, one may choose, based on a lubricant influence coefficient (Z_L), a more efficient lubricating material.

6. Estimation of contact endurance of the toothed mechanisms under the influence of tangential stresses existing in the contact zone between active surfaces of teeth, with respect to a lubricant influence coefficient

Because a value of tangential stresses also depends on a friction force (F_t), associated with sliding, it is expedient to consider this field of research.

It is known that the design calculation of closed toothed gears is performed in terms of endurance based on the permissible contact stresses, in order to avoid fatigue spalling of the teeth working surfaces. According to acting standards, the magnitude of the maximum contact stress between the teeth of toothed gears is calculated according to the Hertz formula [11, 14–16]:

$$\sigma_H = Z_H Z_M Z_L \sqrt{\frac{W_H u \pm 1}{d_{w1} u}} \leq \frac{\sigma_{Hlim} Z_N}{S_H} Z_R Z_S Z_L Z_X Z_Y, \quad (62)$$

where

$$Z_M = \sqrt{\frac{E_r}{\pi(1 - \nu^2)}}$$

is a coefficient that takes account of the mechanical properties of material of the conjugated toothed wheels (for steel toothed wheels, $Z_M = 275 \text{ MPa}^{1/2}$);

$$Z_H = \sqrt{\frac{2 \cos \beta}{\sin 2\alpha_w}}$$

is a coefficient that takes into consideration the shape of the conjugated surfaces of teeth in the engagement pole;

$$Z_\epsilon = \sqrt{\frac{(4 - \epsilon_\alpha)}{3}}$$

is a coefficient that takes account of the total length of contact lines; d_{w2} is the diameter of the initial wheel circumference, which is accepted when calculating as

$$d_{w2} = d_2 = \frac{2a_w u}{u \pm 1};$$

d_2 is the diameter of the pitch circle of the wheel; u is the gear ratio;

$$W_H = \frac{F_t K_{H\alpha} \cdot K_{H\beta} K_{H\gamma}}{b_w}$$

is the normal load per unit length of the contact line of the tooth;

$$F_t = \frac{2T_2}{d_2}$$

is the circumferential force; $b_w = \psi_{ba} \cdot a_w$ is the working width of the toothed gear's crown; $K_{H\alpha}$ is a coefficient that takes into consideration the distribution of load between the teeth; $K_{H\beta}$ is a coefficient that takes account of the uneven distribution of load along the length of contact lines; $K_{H\gamma}$ is a coefficient that takes into consideration the internal dynamic load;

$$E_{np} = \frac{2E_1E_2}{E_1 + E_2}$$

is the reduced modulus of elasticity of materials of toothed gears; E_1, E_2 is the modulus of elasticity of a material of the gear and the wheel, respectively.

Considering these parameters in expression (62), we obtain the following formula

$$\sigma_H = Z_H Z_M Z_\epsilon \sqrt{\frac{T_2 K_{H\alpha} K_{H\beta} K_{H\gamma} (u \pm 1)^3}{2a_u^3 u^2 \psi_{ba} Z_L^2}} \leq [\sigma_H] = \frac{\sigma_{Hlim} Z_N}{S_H} Z_R Z_\epsilon Z_X Z_\epsilon. \quad (63)$$

The study conducted demonstrate that normal contact stresses only indirectly affect the main types of toothed gears fracture. Therefore, the responsibility for the emergence and development of damage should lay with the tangential stresses, which act in the contact zone between active surfaces of the teeth. When a contact zone moves away from the pole line of a tooth, stresses τ_{max} increase in magnitude and approach the surface layers, thereby intensifying the processes of destruction in them. Given this, the greatest surface tangential stresses $\tau_{max,s}$ grow, the magnitude of which may exceed the magnitude of τ_{max} . The direction of interaction between these stresses also creates real conditions for the occurrence and development of fatigue cracks. As was mentioned, the value of these stresses depends on a friction force (F_s), associated with sliding, and the friction force depends on the coefficient of friction.

The study performed [10] shows that should a friction force act between two contacting surfaces, in addition to normal pressure, then the magnitude of the maximum tangential stress is determined from [10]:

$$\tau_{max} = 0,347 \sigma_H = 0,347 \cdot Z_H Z_M Z_\epsilon \sqrt{\frac{T_2 K_{H\alpha} K_{H\beta} K_{H\gamma} (u \pm 1)^3}{2a_u^3 u^2 \psi_{ba} Z_L^2}} \leq [\tau], \quad (64)$$

where $[\tau_s]$ is the permissible tangential stress [2]

$$[\tau_s] = 0,5c_2 [\sigma_H] = \frac{\sigma_{Hlim} Z_N}{S_H} Z_R Z_\epsilon Z_X Z_\epsilon c_2, \quad (65)$$

where c_2 is the coefficient of reliability, adopted based on the probability of non-failure operation of a toothed gear. If the probability of a non-failure operation of the toothed gear is

$$P(t) = 0,9 \Rightarrow c_2 = 1,0,$$

$$P(t) = 0,95 \Rightarrow c_2 = 0,897,$$

$$P(t) = 0,96 \Rightarrow c_2 = 0,865,$$

$$P(t) = 0,97 \Rightarrow c_2 = 0,827,$$

$$P(t) = 0,99 \Rightarrow c_2 = 0,702.$$

In the case of complex stressed state, the estimation stress then is a certain reduced (equivalent) stress obtained based on one of the theories of strength, the most acceptable

for the examined stressed state of a material. For ductile materials

$$\sigma_{\text{re}} = \sqrt{\sigma_H^2 + 4\tau_{\text{max}}^2} = 1,217 \cdot Z_H Z_M Z_\epsilon \sqrt{\frac{T_2 K_{H\alpha} K_{H\beta} K_{H\gamma} (u \pm 1)^3}{2a_u^3 u^2 \psi_{ba} Z_L^2}} \leq [\sigma_H]. \quad (66)$$

In the design calculation, one typically determines the inter-axis spacing or a pitch diameter of the toothed wheel. The inter-axis spacing

$$a_u = K_s (u \pm 1)^2 \sqrt{\frac{T_2 K_{H\beta}}{[\sigma_H]^2 Z_L^2 u^2 \psi_{ba}}}, \quad (67)$$

where K_s is an auxiliary coefficient, for spur gears

$$K_s = \sqrt[3]{(1,217 \cdot Z_H Z_M Z_\epsilon)^2 0,5 K_{H\alpha} K_{H\gamma}} = \sqrt[3]{(1,217 \cdot 275 \cdot 1,76 \cdot 0,9)^2 \cdot 0,5 \cdot 1,0 \cdot 1,25} = 56 \text{ MPa}^{1/3}.$$

Here

$$Z_M = 275 \text{ MPa}^{1/2}; \quad Z_H = 1,76;$$

$$Z_\epsilon = 0,9; \quad K_{H\alpha} = 1,0; \quad K_{H\gamma} = 1,25.$$

For helical gears

$$K_s = \sqrt[3]{(1,217 \cdot Z_H Z_M Z_\epsilon)^2 0,5 K_{H\alpha} K_{H\gamma}} = \sqrt[3]{(1,217 \cdot 275 \cdot 1,71 \cdot 0,8)^2 \cdot 0,5 \cdot 1,1} = 49 \text{ MPa}^{1/3},$$

here

$$Z_M = 275 \text{ MPa}^{1/2}; \quad Z_H = 1,76 \cos \beta = 1,71;$$

$$Z_\epsilon = \sqrt{\frac{1}{\epsilon_\alpha}} = 0,8.$$

The helical gears operate more smoothly than the spur ones, which is why factor $K_{H\gamma}$ is less. Given this observation, we accept the product $K_{H\alpha} K_{H\gamma} = 1,1$.

7. Discussion of results of devising a calculation procedure for toothed gears with respect to the influence of a lubricant

The proposed procedure for the calculation of toothed gears in terms of contact strength at the finite friction coefficient, without the assumptions about the smallness of the contact area and shape of borders, makes it possible to estimate the load capacity of toothed gears considering the influence of lubrication and the existence of friction between the conjugated surfaces of teeth, which is almost disregarded in traditional calculation methods by equating the lubricant influence coefficient K_L to unity. In this case, the value of the resulting stress exceeds the stress, calculated according to the known Hertz solution, by 6 %, which would accordingly improve load capacity of the toothed mechanisms.

The study conducted demonstrates that normal contact stresses only indirectly affect the main types of fracture of toothed gears. Therefore, responsibility for the emergence and development of damage should lay with the tangential stresses, which act in the contact zone between active surfaces of the teeth. However, in the design calculation of toothed gears, the influence of the tangential stress and the effect of a lubricant are almost ignored. The proposed procedure makes it possible to more accurately assess the effect of a lubricating oil on load capacity of the toothed gears and to solve the inverse problem: knowing the kinematical and energy parameters of toothed gears, it is required to choose, based on a lubricant influence coefficient Z_L , a more effective lubricating material. Practical literature on the estimation and design of gear mechanisms should pay more attention to the influence of lubrication on their load capacity, to recommendations on the choice of lubricants for gear mechanisms, to determining the precise value for a lubricant influence coefficient.

When estimating the coefficient of lubricant influence on load capacity of toothed gears, the range of input values for contact parameters is valid at the following ranges in the change in parameters and dimensionality of the input magnitudes:

$$\sigma_H \leq 550 \text{ MPa}; \quad 0 \leq V_z \leq 9,0 \text{ m/s};$$

$$2,0 \leq V_s \leq 12,0 \text{ m/s};$$

$$15 \cdot 10^{-6} \leq v \leq 165 \cdot 10^{-6} \text{ m}^2/\text{s};$$

$$0,16 \cdot 10^{-6} \leq R_a \leq 0,32 \cdot 10^{-6} \text{ m}; \quad \rho \leq 0,1 \text{ m}.$$

If one is to consider the problem outside these ranges, there is a need to conduct additional experiments using different lubricants.

The shortcoming of this study is in that each lubricant requires experiments to calculate a lubricant influence coefficient K_L . The statistical data that would be acquired must be added to existing reference books and tutorials on the calculation and design of toothed gear mechanisms.

7. Conclusions

1. We have solved the problem on the contact between two bodies of arbitrary shape, close to half-planes, at the finite friction coefficient, without assumptions about the smallness of the contact area and the shape of borders; the result revealed that the value of the stress, derived from the refined solution to the contact problem, exceeds the stress, calculated according to the known Hertz solution, by 6 %.

2. The proposed calculation procedure makes it possible to more accurately assess the load-carrying capacity of toothed gears, taking into consideration the influence of lubricants, which is of practical importance when designing machines and assemblies.

3. The result of the refined calculation of toothed wheels in terms of contact strength is the derived analytical expression for a lubricant influence coefficient based on the criterion of a friction coefficient between the conjugated surfaces of friction nodes.

4. Based on the study performed, we propose to take into consideration a lubricant influence coefficient directly to determine the geometrical parameters.

References

1. Utochnenniy raschet zubchatykh peredach na kontaktnuyu prochnost' // DAN Azerb. SSR. Seriya: fiziko-matematicheskikh i tekhnicheskikh nauk. 1984. Issue 12.
2. Utochnenniy raschet zubchatykh peredach na kontaktnuyu prochnost' // DAN Azerb. SSR. Seriya: fiziko-matematicheskikh i tekhnicheskikh nauk. 2004. Vol. 10, Issue 1B. P. 205–211.
3. Polyakov V. K. Chislennoe modelirovaniye processa zacepleniya evol'ventnykh zubchatykh peredach s uchetom treniya // Nauchno-tekhn. zhurnal «VNTR». 2008. Issue 2.
4. Klochko A. A., Gazanov M. I., Basova E. V. Tekhnologicheskoe obespechenie treniya kacheniya i treniya skol'zheniya v zubchatykh peredachakh // Vestnik Nac. tekhn. un-ta „KhPI“. 2015. Issue 40 (1149). P. 102–107.
5. Drozd M. S., Matlin M. M., Sidiyakin Yu. I. Inzhenernye raschety uprugoplasticheskoy kontaktnoy deformatsii. Moscow: Mashinostroyeniye, 1986. 224 p.
6. Grudin G. V. Raschet zubchatykh cilindricheskikh evol'ventnykh peredach. Irkutsk: Izdatel'stvo IrGTU, 2003. 87 p.
7. Kolosova E. M., Korotkin V. I., Chebakov M. I. K voprosu o raschete kontaktnykh napryazheniy i nagruzochnoy sposobnosti evol'ventnykh zubchatykh peredach // Izvestiya vysshikh uchebnykh zavedeniy. Seriya: tekhnicheskije nauki. 2008. Issue 3. P. 107–112.
8. Rudenko S. P., Val'ko A. P. Kontaktnaya ustalost' zubchatykh koles transmissiy energonazysyennykh mashin. Minsk: Belorusskaya nauka, 2014. 127 p.
9. Muskhelishvili N. I. Nekotorye osnovnye zadachi matematicheskoy teorii uprugosti. Moscow: Nauka, 1966. 708 p.
10. Garashchuk G. N., Litvinova V. A. Osnovy rascheta detaley mashin na prochnost'. Tomsk: Izdatel'stvo TGASU, 2013. 92 p.
11. Ivanov M. N., Finogenov V. A. Detali mashin: ucheb. Moscow: Vysshaya shkola, 2008. 408 p.
12. Abdullaev A. I., Cherkasov Sh. B., Ahmedov B. B. Izuchenie vliyaniya nekotorykh upravlyayemykh faktorov na koefitsient treniya skol'zheniya metodom planirovaniya eksperimenta // Uchenye zapiski AzTU. 2000. Vol. VIII, Issue 2. P. 5–9.
13. Ahmedov B. B. Postroyeniye analiticheskoy zavisimosti koefitsienta vliyaniya smazki dlya zubchatykh peredach i podshipnikov kacheniya // Materialy nauchno-tekhnicheskoy konferentsii, AzTU. 2000. P. 259–262.
14. Osnovy rascheta detaley i uzlov transportnykh mashin / Matlin M. M., Mozgunova A. I., Lebskiy S. L., Shandybina I. M. Volgograd: VOIGTU, 2010. 251 p.
15. Iosilevich G. B. Detali mashin. Moscow: Mashinostroyeniye, 1988. 368 p.
16. DIN 3990: Grundlagen für die Tragfähigkeitsberechnung von Gerad- und Schrägstrahldr. Beuth-Verlag, 1990.